





aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



MB / MH Series

Servo Motors from 0.2 to 285 Nm

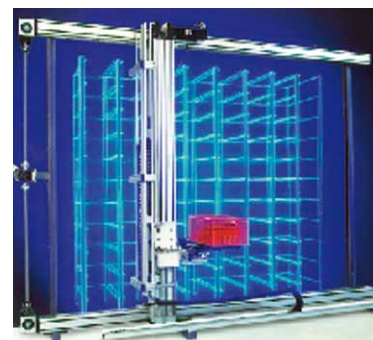

ENGINEERING YOUR SUCCESS.



WARNING – USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Overview	5
Technical Characteristics.....	6
MB / MH Motors, Size 56 - 0.2...0.6 Nm.....	6
MB / MH Motors, Size 70 - 0.5...2.5 Nm.....	8
MB / MH Motors, Size 105 - 2.2...8 Nm.....	10
MB / MH Motors, Size 145 - 4.5...28 Nm.....	12
MB / MH Motors, Size 205 - 15...90 Nm.....	14
MB / MH Motors, Size 265 - 75...270 Nm.....	16
Dimensions	17
Options.....	18
Holding Brake	18
Fan cooling	18
Feedback options	19
Technical specificatione for High inertia	20
Layout and connectors.....	21
Shaft	21
Increased Safety.....	21
Custom options	21
Order Code.....	22
MB / MH Motors	22
Motor Power Cable for MB Motors	24
Feedback Cable for MB Motors	24
Motor Power Cable for MH Motors	25
Feedback Cable for MH Motors	25

Parker Hannifin

- the global leader in motion and control technologies

A world class player on a local stage

Global Product Design

Parker Hannifin has more than 40 years experience in the design and manufacturing of drives, controls, motors and mechanical products. With dedicated global product development teams, Parker draws on industry-leading technological leadership and experience from engineering teams in Europe, North America and Asia.

Local Application Expertise

Parker has local engineering resources committed to adapting and applying our current products and technologies to best fit our customers' needs.

Manufacturing to Meet Our Customers' Needs

Parker is committed to meeting the increasing service demands that our customers require to succeed in the global industrial market. Parker's manufacturing teams seek continuous improvement through the implementation of lean manufacturing methods throughout the process. We measure ourselves on meeting our customers' expectations of quality and delivery, not just our own. In order to meet these expectations, Parker operates and continues to invest in our manufacturing facilities in Europe, North America and Asia.

Worldwide Manufacturing Locations

Europe

Littlehampton, United Kingdom
Dijon, France
Offenburg, Germany
Milan, Italy

Asia

Shanghai, China
Chennai, India

North America

Rohnert Park, California
Irwin, Pennsylvania
Wadsworth, Ohio
Charlotte, North Carolina
New Ulm, Minnesota



Offenburg, Germany

Local Manufacturing and Support in Europe

Parker provides sales assistance and local technical support through a network of dedicated sales teams and authorized technical distributors throughout Europe.


For contact information, please refer to the Sales Offices on the back cover of this document or visit www.parker.com



Milan, Italy



Littlehampton, UK

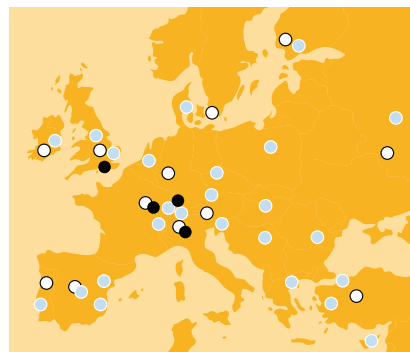

- Manufacturing
- Parker Sales Offices
- Distributors



Dijon, France

Servo Motor - MB / MH

Overview

Description

The MB / MH ⁽¹⁾ series caters for torques in the range of 0.2 to 285 Nm, speeds up to 10000 min⁻¹ and includes a total of 75 models available across 6 frame sizes. Thanks to the high quality and performance of the Neodymium-Iron-Boron magnets, and also the encapsulation method used to fasten them to the shaft, the MB / MH series of motors can achieve very high accelerations and withstand high overload without the risk of demagnetisation or detachment of the magnets.

Furthermore, shaft and flange size flexibility on all models provides the user with the possibility to optimise their motor selection for any given application.

Adequate mechanical over-sizing, low inertia in an extra-strong mechanism and a broad range of models permits the application of the MB / MH series in all fields where high dynamic performance and utmost reliability are crucial features.

Typical applications include any type of automatic machinery, especially in the product packaging and handling industry, and wherever the demand exists for axis speed and position synchronisation.

Features

- Large set of feedback option
- Customization
- Increase inertia option
- ATEX certification for MB/MH105/145
- Options
 - Flying cables
 - Terminal box (power and resolver)
 - External encoder
 - Increased inertia
 - Brake
 - Feedback - resolver/incremental/ SinCos/absolute encoder
 - Thermal protection (PTC for MB and KTY for MH)
 - Second shaft

Application

- Food, Pharma & Beverage
- Packaging Machines
- Material Forming
- Material Handling
- Factory Automation
- Life Science Diagnostic
- Automotive Industry / In-Plant
- Printing Industry
- Textile Machines
- Robotics
- Servo Hydraulic Pumps



Technical Characteristics - Overview

Motor Type	Permanent magnets synchronous servo motor
Rotor Design	Rotor with surface rare earth magnets
Power supply	230 VAC or 400 VAC
Operating temperature	-10/+40 °C
Number of poles	4 for M_ 56-70 8 for M_ 105-145-205-265
Power Range	0.05...67 kW
Torque Range	0.2...285 Nm
Speed Range	0...10000 min ⁻¹
Mounting	Flange with smooth holes B14, B3 option
Shaft End	Plain keyed shaft Plain smooth shaft (option)
Cooling	Natural ventilation Self-ventilation (option for size 105-145-205) Forced Ventilation (option for size 105-145-205) Water cooled (option for size 145)
Protection Level (IEC60034-5)	IP64 IP65 (option)
Feedback sensor	Resolver Absolute Endat or Hiperface Incremental Encoder
Voltage Supply	230 / 400 VAC
Temperature Class	Class F
Connections	Connectors Flying cables Terminal Box (see table option for combination)
Marking	CE
Standards In compliance with:	73/23/CEE e 93/68/CEE EN60034-1 EN60034-5 EN60034-5/A1 EN60034-9 EN60034-14

⁽¹⁾ MB: for Drives TPD-M, SLVD-N, Twin-N, SPD-N, Hi-Drive / MH: for Drive Compax3

Technical Characteristics

MB / MH Motors, Size 56 - 0.2...0.6 Nm

230 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 56 25 0.2	56	0.2 (0.40)	0.27	0.21	2500	0.26	1.3	11	28	0.48	0.83
M_ 56 50 0.2			0.46	0.19	5000	0.42				0.28	0.48
M_ 56 100 0.2			0.84	0.15	10000	0.60				0.15	0.26
M_ 56 25 0.4		0.4 (0.80)	0.49	0.40	2500	0.46	2.5	16	33	0.52	0.91
M_ 56 50 0.4			0.84	0.35	5000	0.71				0.30	0.53
M_ 56 100 0.4			1.52	0.21	10000	0.81				0.17	0.29
M_ 56 25 0.6		0.6 (1.14)	0.67	0.60	2500	0.63	3.6	21	38	0.57	0.99
M_ 56 50 0.6			1.21	0.51	5000	0.98				0.32	0.55
M_ 56 100 0.6			2.18	0.18	10000	0.71				0.18	0.31

400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 56 50 0.2	56	0.2 (0.40)	0.27	0.19	5000	0.24	1.3	11	28	0.48	0.83
M_ 56 95 0.2			0.46	0.16	9500	0.36				0.28	0.48
M_ 56 50 0.4		0.4 (0.80)	0.49	0.34	5000	0.40	2.5	16	33	0.52	0.91
M_ 56 95 0.4			0.84	0.23	9500	0.48				0.30	0.53
M_ 56 50 0.6		0.6 (1.14)	0.67	0.50	5000	0.54	3.6	21	38	0.57	0.99
M_ 56 95 0.6			1.21	0.25	9500	0.51				0.32	0.55


⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature

⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating


⁽³⁾ Tolerance data ±10 %

Speed Torque Curves


5000 min⁻¹ 230 V - 9500 min⁻¹ 400 V

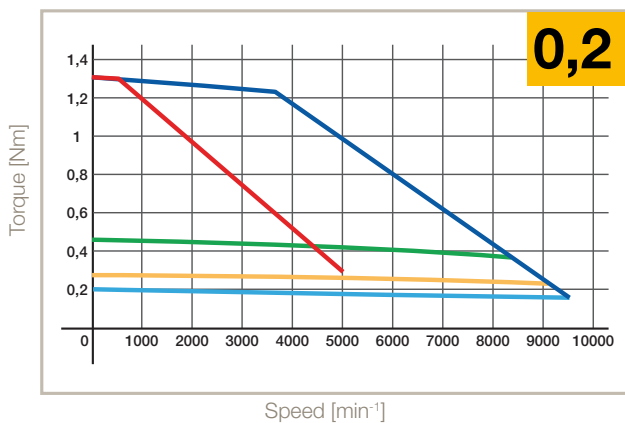

5000 min⁻¹ 230 V - 9500 min⁻¹ 400 V

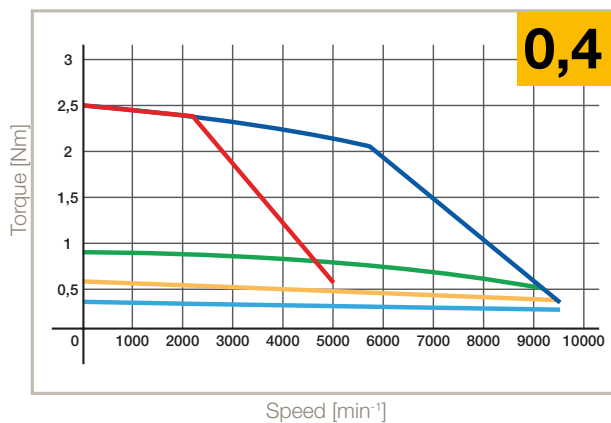

5000 min⁻¹ 230 V - 9500 min⁻¹ 400 V

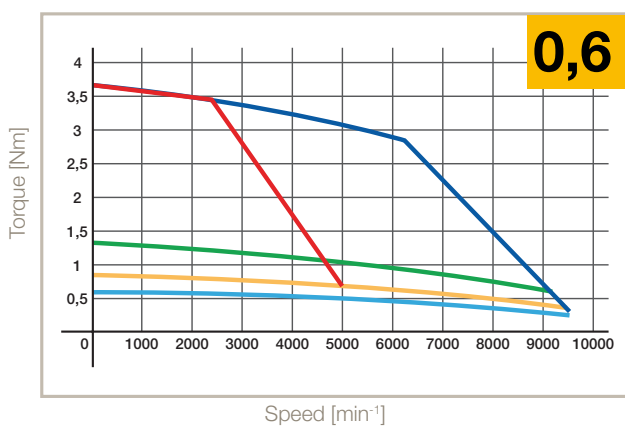

- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 20 %, 5 min

MB / MH Motors, Size 70 - 0.5...2.5 Nm

230 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 70 20 0.5	70	0.5 (0.9)	0.44	0.5	2000	0.43	2.8	26	55	0.67	1.17
M_ 70 38 0.5			0.72	0.4	3800	0.66				0.41	0.71
M_ 70 75 0.5			1.37	0.4	7500	1.00				0.22	0.38
M_ 70 20 01		1.0 (1.6)	0.84	1.0	2000	0.80	5.1	40	69	0.72	1.25
M_ 70 38 01			1.39	0.8	3800	1.23				0.42	0.72
M_ 70 75 01			2.65	0.5	7500	1.43				0.23	0.39
M_ 70 20 1.5		1.5 (2.2)	1.23	1.5	2000	1.18	6.8	54	83	0.73	1.27
M_ 70 38 1.5			2.25	1.4	3800	1.96				0.42	0.72
M_ 70 75 1.5			4.07	0.7	7500	1.85				0.23	0.39
M_ 70 20 02		2.0 (2.7)	1.55	1.9	2000	1.47	8.4	68	97	0.78	1.36
M_ 70 38 02			2.82	1.7	3800	2.40				0.43	0.75
M_ 70 75 02			5.36	0.6	7500	1.74				0.23	0.39
M_ 70 20 2.5		2.5 (3.1)	1.90	2.4	2000	1.82	9.8	81	11	0.79	1.36
M_ 70 38 2.5			3.56	2.1	3800	3.01				0.42	0.73
M_ 70 75 2.5			6.77	0.6	7500	1.77				0.22	0.38

400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [10 ⁻³ kgm ²]	J [10 ⁻³ kgm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 70 37 0.5	70	0.5 (0.9)	0.44	0.5	3700	0.41	2.8	26	55	0.67	1.17
M_ 70 70 0.5			0.72	0.4	7000	0.55				0.41	0.71
M_ 70 37 01		1.0 (1.6)	0.84	0.9	3700	0.74	5.1	40	69	0.72	1.25
M_ 70 70 01			1.39	0.6	7000	0.85				0.42	0.72
M_ 70 37 1.5		1.5 (2.2)	1.23	1.3	3700	1.07	6.8	54	83	0.73	1.27
M_ 70 70 1.5			2.25	0.8	7000	1.27				0.42	0.72
M_ 70 37 2.0		2.0 (2.7)	1.55	1.7	3700	1.32	8.4	68	97	0.78	1.36
M_ 70 70 2.0			2.82	0.9	7000	1.35				0.43	0.75
M_ 70 37 2.5		2.5 (3.1)	1.90	2.1	3700	1.60	9.8	81	110	0.79	1.36
M_ 70 70 2.5			3.56	1.2	7000	1.73				0.42	0.73

⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature


⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating

⁽³⁾ Tolerance data ±10 %


Speed Torque Curves

MB/H70


3800 min⁻¹ 230 V - 7000 min⁻¹ 400 V

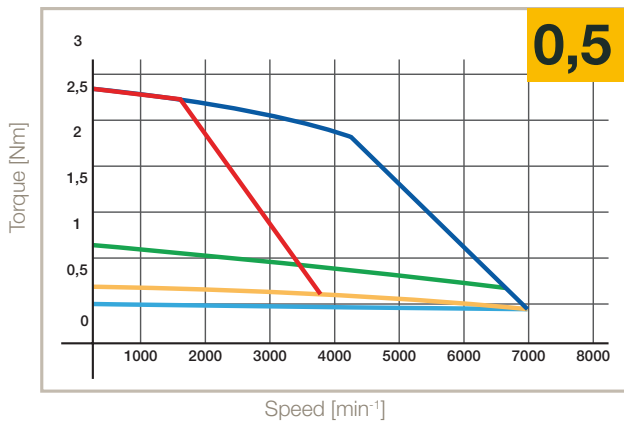


3800 min⁻¹ 230 V - 7000 min⁻¹ 400 V

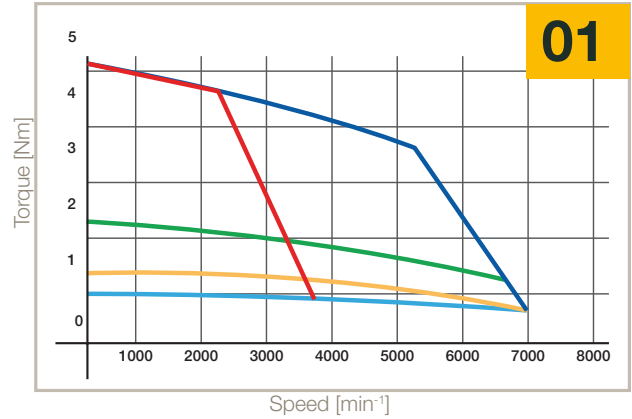


3800 min⁻¹ 230 V - 7000 min⁻¹ 400 V

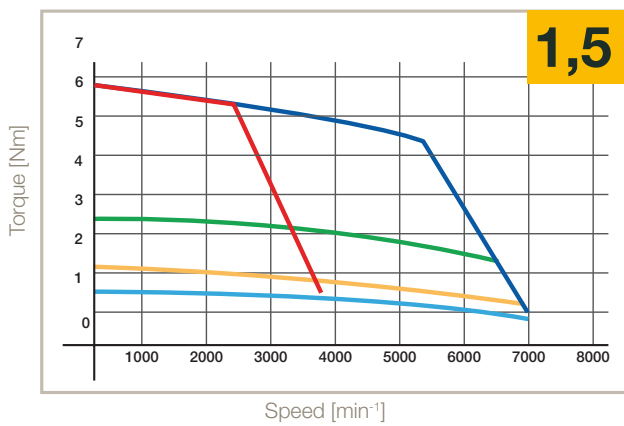

3800 min⁻¹ 230 V - 7000 min⁻¹ 400 V

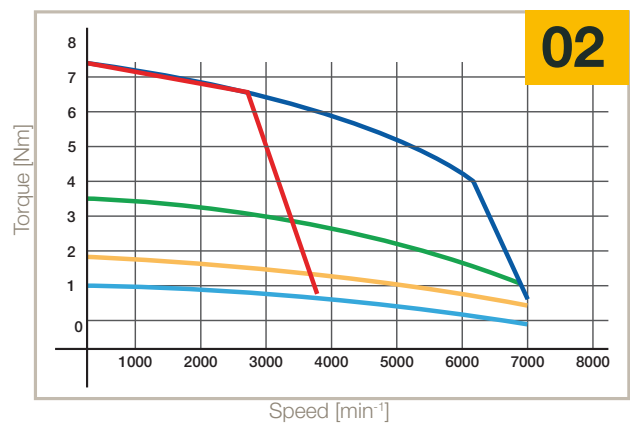

3800 min⁻¹ 230 V - 7000 min⁻¹ 400 V

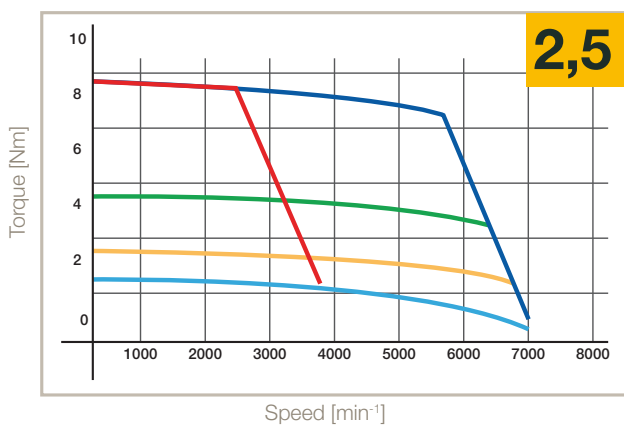

- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 20 %, 5 min

MB / MH Motors, Size 105 - 2.2...8 Nm

230 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 105 16 02	105	2.2 (3.5)	1.5	2.2	1600	1.4	11.0	190	253	0.9	1.63
M_ 105 25 02			2.1	2.1	2500	2.0				0.6	1.11
M_ 105 30 02			2.8	2.1	3000	2.6				0.5	0.83
M_ 105 50 02			4.3	1.8	5000	3.5				0.3	0.55
M_ 105 16 04		4.0 (6.1)	2.6	4.0	1600	2.5	19.5	340	403	1.0	1.65
M_ 105 25 04			3.8	3.7	2500	3.5				0.7	1.13
M_ 105 30 04			5.0	3.6	3000	4.4				0.5	0.85
M_ 105 50 04			7.4	2.7	5000	5.0				0.3	0.58
M_ 105 16 06		6.0 (8.3)	3.9	5.9	1600	3.7	26.2	480	543	1.0	1.65
M_ 105 25 06			5.6	5.5	2500	5.0				0.7	1.15
M_ 105 30 06			7.4	5.2	3000	6.4				0.5	0.87
M_ 105 50 06			11.2	3.6	5000	6.7				0.3	0.58
M_ 105 16 08		8.0 (10.0)	5.2	7.8	1600	5.0	31.7	620	0,683	1.0	1.65
M_ 105 25 08			7.5	7.2	2500	6.6				0.7	1.15
M_ 105 30 08			9.7	6.8	3000	8.2				0.5	0.88
M_ 105 50 08			14.2	4.4	5000	7.9				0.4	0.61

400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 105 30 02	105	2.2 (3.5)	1.5	2.1	3000	1.4	11.0	190	253	0.9	1.63
M_ 105 45 02			2.1	1.9	4500	1.8				0.6	1.11
M_ 105 60 02			2.8	1.7	6000	2.2				0.5	0.83
M_ 105 30 04		4.0 (6.1)	2.6	3.6	3000	2.3	19.5	340	403	1.0	1.65
M_ 105 45 04			3.8	3.0	4500	2.8				0.7	1.13
M_ 105 60 04			5.0	2.4	6000	3.0				0.5	0.85
M_ 105 30 06		6.0 (8.3)	3.9	5.3	3000	3.4	26.2	480	543	1.0	1.65
M_ 105 45 06			5.6	4.1	4500	3.8				0.7	1.15
M_ 105 60 06			7.4	3.0	6000	3.7				0.5	0.87
M_ 105 30 08		8.0 (10.0)	5.2	6.9	3000	4.4	31.7	620	683	1.0	1.65
M_ 105 45 08			7.5	5.2	4500	4.9				0.7	1.15
M_ 105 60 08			9.7	3.6	6000	4.4				0.5	0.88

⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature


⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating

⁽³⁾ Tolerance data ±10 %


Speed Torque Curves

MB/H105


3000 min⁻¹ 230 V - 6000 min⁻¹ 400 V

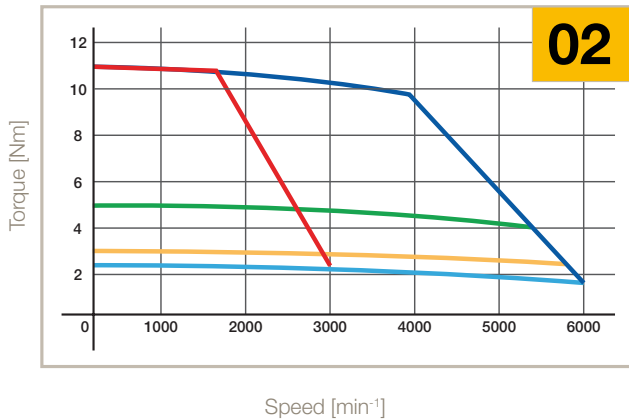


3000 min⁻¹ 230 V - 6000 min⁻¹ 400 V

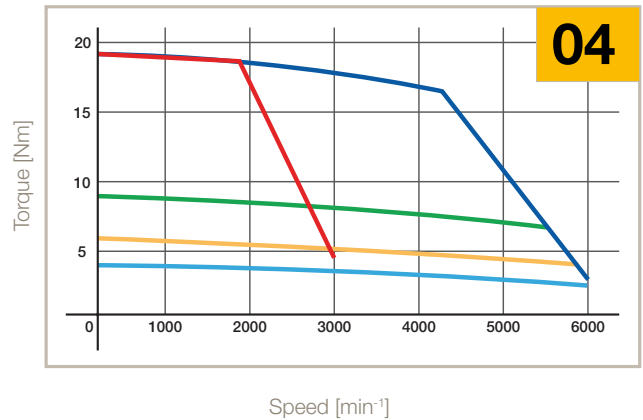

3000 min⁻¹ 230 V - 6000 min⁻¹ 400 V

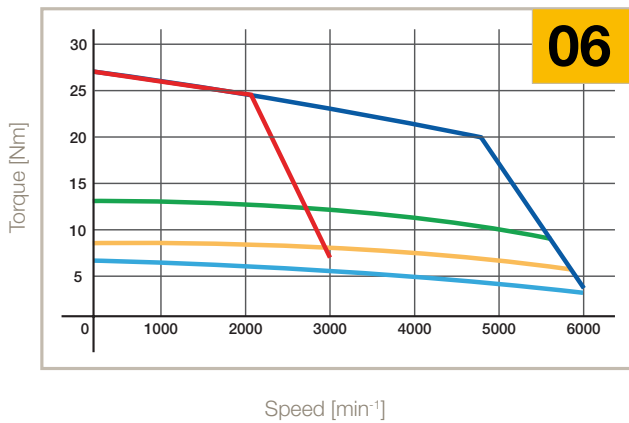

3000 min⁻¹ 230 V - 6000 min⁻¹ 400 V

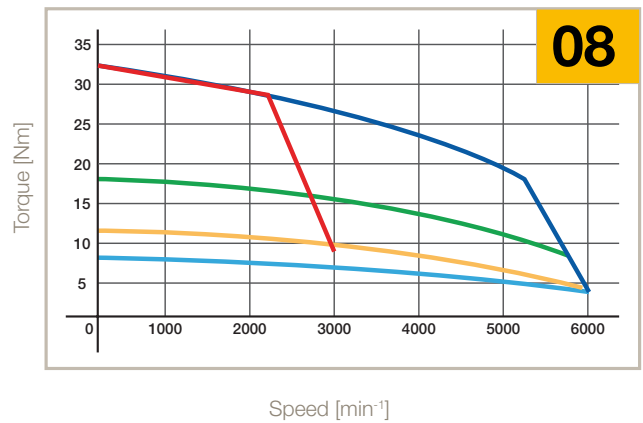

- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 20 %, 5 min

MB / MH Motors, Size 145 - 4.5...28 Nm

230 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 145 5.5 04	145	4.5 (9)	1.1	4.6	550	1.1	28	780	975	2.1	3.65
M_ 145 11 04			2.3	4.6	1100	2.4				1.2	2.03
M_ 145 16 04			3.4	4.5	1600	3.3				0.8	1.42
M_ 145 25 04			4.7	4.3	2500	4.5				0.6	1.01
M_ 145 40 04			8.1	4.1	4000	7.2				0.4	0.60
M_ 145 5.5 08		8.7 (16)	2.0	8.7	550	2.0	49	1050	1245	2.7	4.69
M_ 145 11 08			3.7	8.7	1100	3.6				1.4	2.49
M_ 145 16 08			5.4	8.6	1600	5.2				1.0	1.70
M_ 145 25 08			8.2	8.1	2500	7.4				0.7	1.14
M_ 145 40 08			12.3	7.0	4000	9.7				0.4	0.76
M_ 145 5.5 15		15.0 (27)	3.3	15.0	550	3.2	86	1600	1795	2.9	4.94
M_ 145 11 15			6.2	14.7	1100	5.9				1.5	2.59
M_ 145 16 15			9.1	14.3	1600	8.5				1.0	1.78
M_ 145 25 15			14.2	13.6	2500	12.5				0.7	1.14
M_ 145 40 15			21.3	10.9	4000	15.0				0.4	0.76
M_ 145 5.5 22		22.0 (37)	4.7	21.9	550	4.6	117	2150	2345	2.9	5.03
M_ 145 11 22			8.9	21.3	1100	8.4				1.5	2.65
M_ 145 16 22			13.1	20.8	1600	12.1				1.0	1.80
M_ 145 25 22			20.8	19.1	2500	17.6				0.7	1.13
M_ 145 40 22			31.1	13.4	4000	18.6				0.4	0.76
M_ 145 5.5 28		28.0 (45)	5.9	27.8	550	5.8	143	2700	2895	2.9	5.07
M_ 145 11 28			11.3	26.9	1100	10.6				1.5	2.65
M_ 145 16 28			17.0	26.2	1600	15.5				1.0	1.78
M_ 145 25 28			26.5	23.2	2500	21.4				0.7	1.13
M_ 145 40 28			39.6	14.1	4000	19.7				0.4	0.76


400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 145 10 04	145	4.5 (9)	1.1	4.5	1000	1.1	28	780	975	2.1	3.65
M_ 145 20 04			2.3	4.5	2000	2.3				1.2	2.03
M_ 145 30 04			3.4	4.3	3000	3.2				0.8	1.42
M_ 145 45 04			4.7	3.9	4500	4.0				0.6	1.01
M_ 145 10 08		8.7 (16)	2.0	8.7	1000	1.9	49	1050	1245	2.7	4.69
M_ 145 20 08			3.7	8.4	2000	3.5				1.4	2.49
M_ 145 30 08			5.4	7.9	3000	4.8				1.0	1.70
M_ 145 45 08			8.2	7.1	4500	6.6				0.7	1.14
M_ 145 10 15		15.0 (27)	3.3	14.8	1000	3.1	86	1600	1795	2.9	4.94
M_ 145 20 15			6.2	13.7	2000	5.5				1.5	2.59
M_ 145 30 15			9.1	12.7	3000	7.5				1.0	1.78
M_ 145 45 15			14.2	9.8	4500	9.1				0.7	1.14
M_ 145 10 22		22.0 (37)	4.7	21.4	1000	4.5	117	2150	2345	2.9	5.03
M_ 145 20 22			8.9	19.4	2000	7.6				1.5	2.65
M_ 145 30 22			13.1	17.3	3000	10.1				1.0	1.80
M_ 145 45 22			20.8	11.6	4500	10.8				0.7	1.13
M_ 145 10 28		28.0 (45)	5.9	27.1	1000	5.6	143	2700	2895	2.9	5.07
M_ 145 20 28			11.3	23.9	2000	9.4				1.5	2.65
M_ 145 30 28			17.0	21.1	3000	12.5				1.0	1.78
M_ 145 45 28			26.5	10.0	4500	9.4				0.7	1.13


Speed Torque Curves

MB/H145


2500 min⁻¹ 230 V - 4500 min⁻¹ 400 V

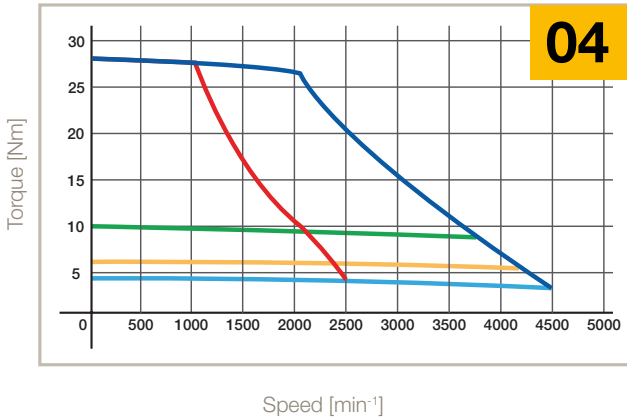


2500 min⁻¹ 230 V - 4500 min⁻¹ 400 V

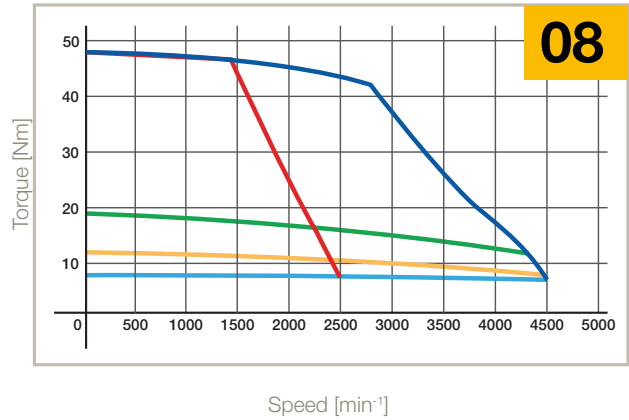


2500 min⁻¹ 230 V - 4500 min⁻¹ 400 V

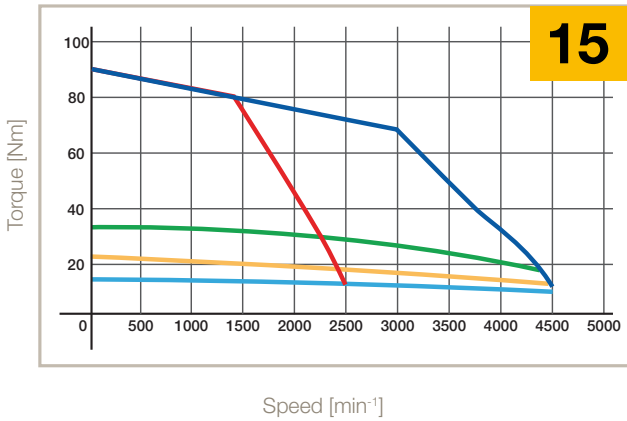

2500 min⁻¹ 230 V - 4500 min⁻¹ 400 V

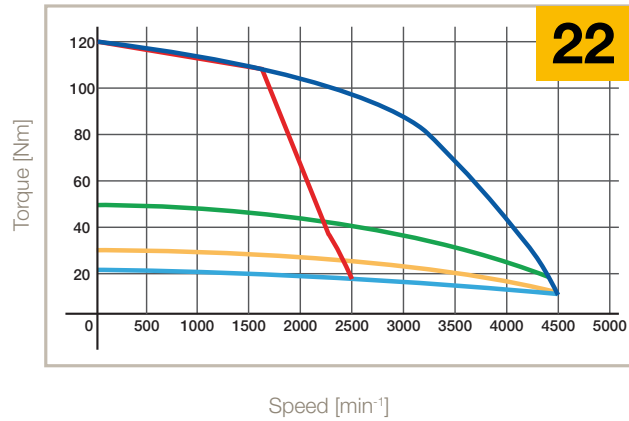

2500 min⁻¹ 230 V - 4500 min⁻¹ 400 V

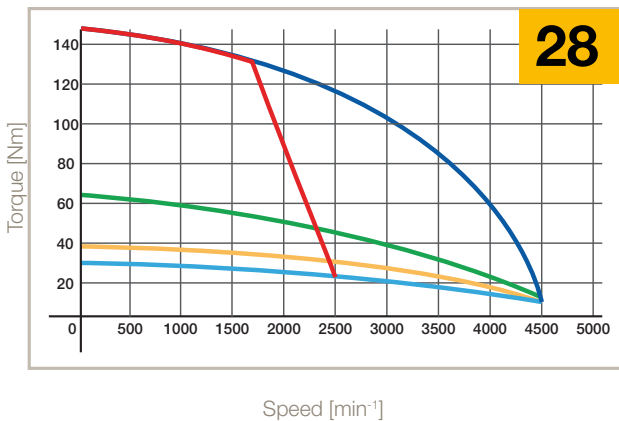

— S1 65 K, ΔT
— S3 10 %, 5 min, 400 V
— S3 10 %, 5 min, 230 V
— S3 50 %, 5 min
— S3 20 %, 5 min

- ⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature
⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating
⁽³⁾ Tolerance data ±10 %

MB / MH Motors, Size 205 - 15...90 Nm

230 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 205 11 15	205	15	6.3	14.7	1150	6.2	69	3500	4035	1.4	2.38
M_ 205 17 15		(22)	8.6	14.4	1700	8.3				1	1.74
M_ 205 5.5 28		28 (39)	6.9	28.6	550	6.9	123	5000	5535	2.5	4.35
M_ 205 11 28			13.0	28.2	1150	12.7				1.3	2.31
M_ 205 17 28			20.1	27.6	1700	19.3				0.9	1.50
M_ 205 5.5 50		50 (70)	12.4	51.3	550	12.3	222	8000	8535	2.5	4.35
M_ 205 11 50			22.1	50.0	1150	21.3				1.4	2.45
M_ 205 17 50			33.1	48.0	1700	30.8				0.9	1.63
M_ 205 5.5 70		70 (98)	16.8	71.1	550	16.5	310	11000	11535	2.6	4.49
M_ 205 11 70			30.7	68.6	1150	29.3				1.4	2.45
M_ 205 17 70			46.1	65.0	1700	41.7				0.9	1.63
M_ 205 5.5 90		90 (126)	22.1	90.9	550	21.8	398	14000	14535	2.5	4.35
M_ 205 11 90			44.3	87.0	1150	41.8				1.3	2.18
M_ 205 17 90			59	81.7	1700	52.4				0.9	1.63

400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₀₆₅ [A]	T _{n065} [Nm]	n [min ⁻¹]	I _{n065} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 205 20 15	205	15	6.3	14.1	2000	5.9	69	3500	4035	1.4	2.38
M_ 205 30 15		(22)	8.6	13.4	3000	7.7				1	1.74
M_ 205 10 28		28 (39)	6.9	28.2	1000	6.8	123	5000	5535	2.5	4.35
M_ 205 20 28			13.0	27.3	2000	12.3				1.3	2.31
M_ 205 30 28			20.1	25.7	3000	18.0				0.9	1.50
M_ 205 10 50		50 (70)	12.4	50.4	1000	12.1	222	8000	8535	2.5	4.35
M_ 205 20 50			22.1	47.0	2000	20.1				1.4	2.45
M_ 205 30 50			33.1	41.7	3000	26.8				0.9	1.63
M_ 205 10 70		70 (98)	16.8	69.4	1000	16.1	310	11000	11535	2.6	4.49
M_ 205 20 70			30.7	62.9	2000	26.9				1.4	2.45
M_ 205 30 70			46.1	52.3	3000	33.7				0.9	1.63
M_ 205 10 90		90 (126)	22.1	88.2	1000	21.2	398	14000	14535	2.5	4.35
M_ 205 20 90			44.3	78.3	2000	37.7				1.3	2.18
M_ 205 30 90			59.0	61.6	3000	39.7				0.9	1.63

⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature


⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating

⁽³⁾ Tolerance data ±10 %


Speed Torque Curves

MB/H205


1700 min⁻¹ 230 V - 3000 min⁻¹ 400 V

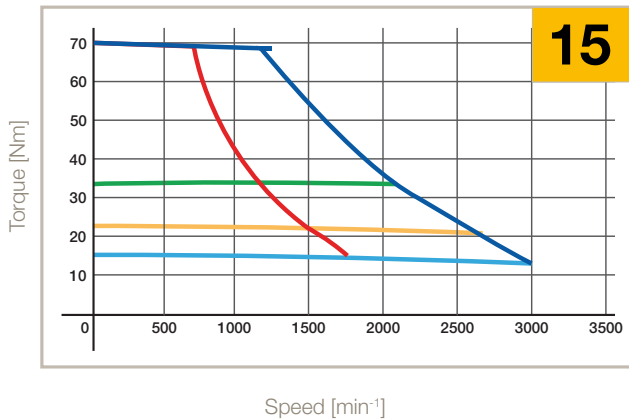


1700 min⁻¹ 230 V - 3000 min⁻¹ 400 V

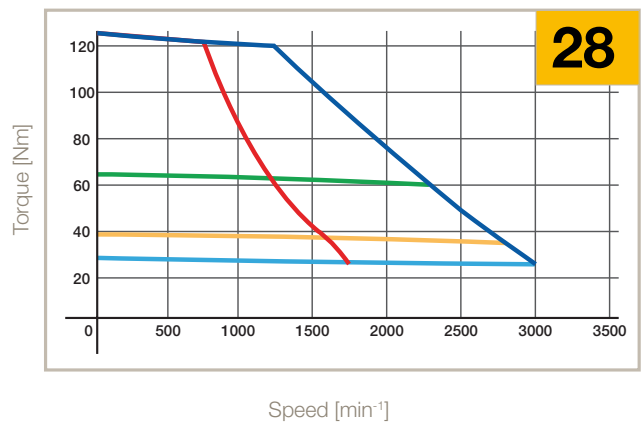


1700 min⁻¹ 230 V - 3000 min⁻¹ 400 V

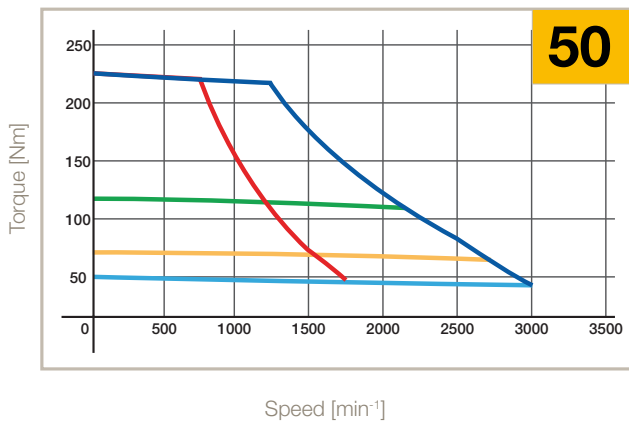

1700 min⁻¹ 230 V - 3000 min⁻¹ 400 V

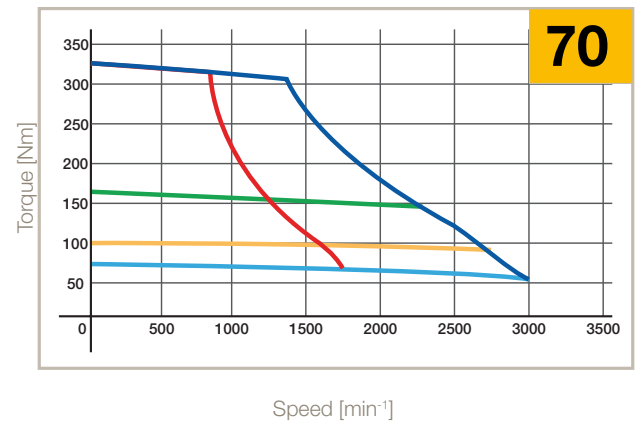

1700 min⁻¹ 230 V - 3000 min⁻¹ 400 V

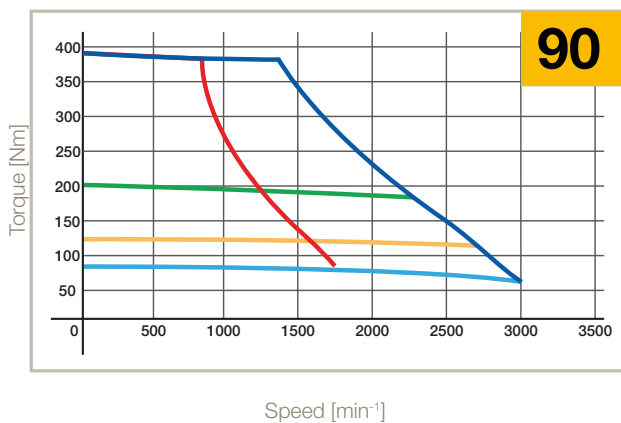

- S1 65 K, ΔT
- S3 10 %, 5 min, 400 V
- S3 10 %, 5 min, 230 V
- S3 50 %, 5 min
- S3 20 %, 5 min

MB / MH Motors, Size 265 - 75...270 Nm

400 VAC

Model	Size	Stall		Nominal			Peak Torque ⁽¹⁾	Inertia		Ke ⁽²⁾⁽³⁾	Kt ⁽²⁾⁽³⁾
		Torque ⁽¹⁾	Current	Torque ⁽¹⁾	Speed	Current		No brake	With brake		
		T ₀₆₅ (T ₁₀₅) [Nm]	I ₁₀₅ [A]	T _{n105} [Nm]	n [min ⁻¹]	I _{n105} [A]	T _{max} [Nm]	J [kgmm ²]	J [kgmm ²]	Ke [Vs]	Kt [Nm/A _{rms}]
M_ 265 10 75	265	75 (94)	20	94	1000	20.1	235	22 000	30 100	2.86	4.71
M_ 265 20 75		74 (92)	39	92	2000	39				1.43	2.35
M_ 265 30 75			59	87	3000	55				0.95	1.57
M_ 265 10 150		142 (176)	37	176	1000	37	451	36 000	44 100	2.86	4.71
M_ 265 20 150		144 (179)	86	170	2000	81				1.27	2.09
M_ 265 30 150		141 (175)	112	144	3000	92				0.95	1.57
M_ 265 10 220		206 (255)	54	254	1000	54	657	49 000	61 960	2.86	4.71
M_ 265 20 220		206 (255)	108	231	2000	98				1.43	2.35
M_ 265 30 220		205 (254)	162	185	3000	118				0.95	1.57
M_ 265 10 285		267 (332)	64	325	1000	62	857	63 000	75 960	3.18	5.23
M_ 265 20 285		267 (332)	159	288	2000	138				1.27	2.09
M_ 265 30 285		269 (334)	213	215	3000	137				0.95	1.57


⁽¹⁾ Data referred to motor suspend in horizontal position in free still air, 20 °C ambient temperature

⁽²⁾ Data measured at 20 °C. When "hot" consider 5 % derating


⁽³⁾ Tolerance data ±10 %

Speed Torque Curves


3000 min⁻¹ 400 V

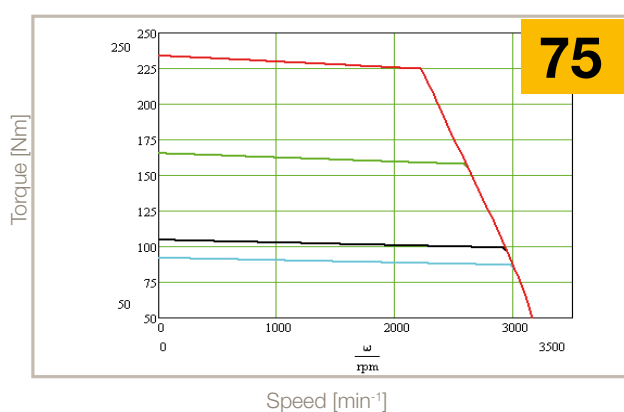


3000 min⁻¹ 400 V

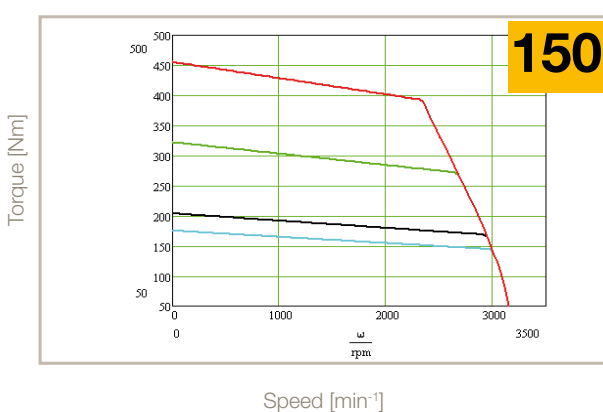

3000 min⁻¹ 400 V

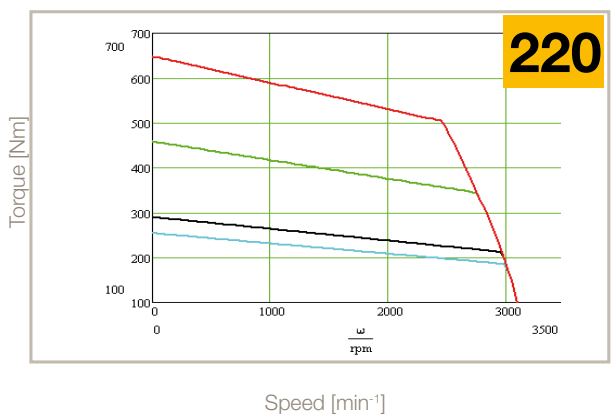


3000 min⁻¹ 400 V

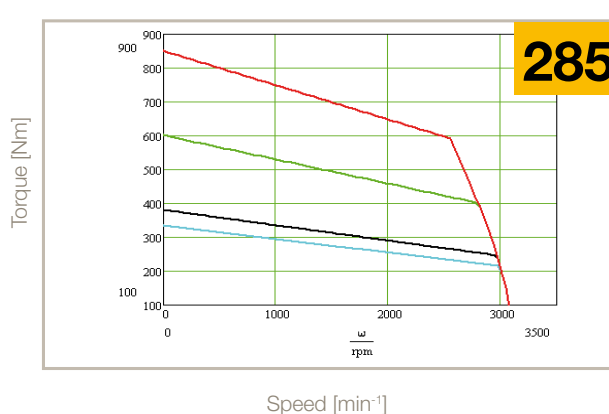

— S1 65 K, ΔT
 — S3 10 %, 5 min, 400 V
 — S3 10 %, 5 min, 230 V
 — S3 50 %, 5 min
 — S3 20 %, 5 min

Dimensions

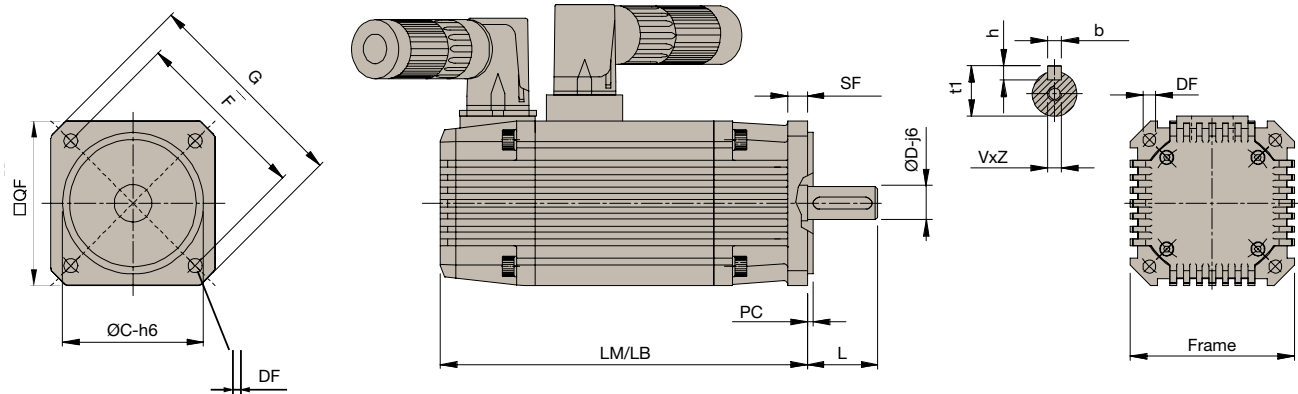

Motor - Size			LM/LB	Weight	DxL	bxh	t1	VxZ	C	F	DF	G	SF	PC	QF	Order code QF
MB / MH	56	0.2	130.5/181.5	0.7	9x20 11x23	3x3 4x4	10.2 12.5	M4x10	40	63	5.5	74	6.5	2.5	56	5
		0.4	150.5/201.5	1												
		0.6	170.5/221.5	1.3												
	70	0.5	158/214	2	11x23 14x30	4x4 5x5	12.5 16	M4x10 M4x12.5	60	75	6	90	8.5	2.5	70	5
		01	188/244	2.8												
		1.5	218/274	3.5												
		02	248/304	4.3												
		2.5	278/334	5.1												
	105	02	186/250	5	19x40 24x50	6x6 8x7	21.5 27	M6x16 M8x19	95	115	9.5	140	10	3.5	105	5
		04	229/293	7					95	115	9.5	140	10	3.5	105	4
		06	273/337	9					80	115	9.5	140	10	3.5	105	9
		08	317/381	11					110	115	9.5	140	10	3.5	105	6
	145	04	200/274	8	19x40 24x50 28x60	6x6 8x7	21.5 27 31	M6x16 M8x19 M10x22	130	165	11.5	200	12	3.5	145	5
		08	231/305	12					130	165	11.5	200	12	3.5	145	4
		15	292/366	18												
		22	354/428	23												
		28	416/490	28												
	205	15	239/338	20	38x80 42x110	10x8 12x8	41 45	M12x32 M16x40	180	215	14	250	18	4	205	5
		28	273/372	29												
		50	342/441	44												
		70	411/510	59												
		90	480/579	74												
	265	75	340/475	89	48X110	14x9	51.5	M16x40	250	300	19	342	35	4	264	5
		150	447/582	126												
		220	554/689	164												
		285	661/796	203												

LM: motor length without brake with resolver
LB: motor length with brake with resolver
DxL: Shaft
bxh: Key
t1: Overall shaft height
VxZ: Shaft hole depth

mm for dimensions, kg for weight

C: Center
F: distance between center of holes clamp
DF: Fixing holes
G: dimension in diagonal
SF: flange thickness
PC: centering depth
QF: flange square

Options

Parker Mx family motors are available with standard and custom options to adapt motor on your application. If the option for your application is not listed, please consult our technical department.

Holding Brake

All MB, MH motors are available with an optional holding brake. Two different brake types exist, standard holding brake (option A) and special brake (option B) depending on the features of your application needs. Incorporated into the motor is the fail-safe holding brake (supply voltage 24VDC $\pm 10\%$) which is applied when no voltage is present. Because of the power taken by the brake, torque values must be reduced by 5% (10% for size 265). The holding brake shall be used with the motor only at a standstill and not for dynamic braking. When used normally they are maintenance free.

Holding Brake ⁽¹⁾	Option	Voltage [V]	Current @ 20°C [A]	Torque @ 20°C [Nm]	Added Length [mm]	Added Weight [kg]	Torque derating of motor
M_56_A	A	24 $\pm 10\%$	0.32	0.6	51	0.8	5%
M_56_B	B				n.a.		
M_70_A)	A	24 $\pm 10\%$	0.53	2	56	1.1	5%
M_70_B	B				n.a.		
M_105_A	A	24 $\pm 10\%$	1.1	10	64	3	5%
M_105_B	B				n.a.		
M_145_A_04	A	24 $\pm 10\%$	1.8	4	74	5	5%
M_145_A_08				8			
M_145_A_15				15			
M_145_A_22				22			
M_145_A_28				28			
M_145_B	B	24 $\pm 10\%$	0.75	22	74	5	5%
M_205_A	A	24 $\pm 10\%$	1.35	90	99	14	5%
M_205_B	B	24 $\pm 10\%$	1.2	120	99	14	5%
M_265_A_75	A	24 $\pm 10\%$	2.9	225	135	30	10%
M_265_A_150							
M_265_A_220							
M_265_A_285				450		35	
M_265_B	B				n.a.		

⁽¹⁾ If more than one option is required, please check with our technical department the feasibility.

Fan cooling

For high duty cycle applications, Parker offer 3 different types of cooling option: servo-ventilated, self ventilated and water cooled. With servo-ventilated the motors (order Code M_SV), an increase of 25 % torque and current based on nominal values (except for the maximum torque and current data) is provided. The servo-ventilated 205 motor is equipped with an external condenser for starting the fan.

With the self-ventilated option (order Code M_V), the torque is increased proportionally to the nominal speed.

For water-cooled motors (order code M_W, available only for size 145), consider a performance increase of approx. 100 % in the torque and current, except peak data.

Motor MB / MH	Option ⁽¹⁾	Voltage	Current [A]	Frequency [Hz]	speed [min ⁻¹]	Added Length [mm]	Added Weight [kg]	Torque increasing of motor
105	SV	24 VDC $\pm 10\%$	0.17	n.a.	3000	64	1	25%
	V	n.a.	n.a.	n.a.	n.a.	34	0.25	Depending of speed
145	SV	230 VAC Single Phase $\pm 10\%$	0.35	50	3000	97	2	25%
	V	n.a.	n.a.	n.a.	n.a.	44	0.55	Depending of speed
205	SV	230 VAC Single Phase $\pm 10\%$	0.22	50	3000	109	2.2	25%
	V	n.a.	n.a.	n.a.	n.a.	54	1.1	Depending of speed
265	SV	230 VAC Single Phase $\pm 10\%$	0.22	50	3000	109	2.2	25%

⁽¹⁾ If more than one option is required, please check with our technical department the feasibility.

Feedback options

M_ motors are available with standard resolver feedback, but for different type of application we can offer the following types of feedback:

- Incremental Encoder with hall sensors
- Hiperface absolute encoder (single or multi-turn)
- EnDat absolute encoder (single or multi-turn)

Resolver

Poles	2
Transformation ratio	0.5
Operating temperature	-50 .. +150 °C
Motor associations	All Sizes

Incremental Encoder with Hall Sensor

Code	A1	A2	A3	B1	C4
Resolution [C/T]	2000	2048	4096	3000	5000
Poles	8			4	8
System Accuracy	±32"	±32"	±16"	±22"	±13"
Voltage	+5 VDC ±5 % - 200 mA				
Reference Mark	Yes				
Max Speed [min ⁻¹]	6000				
Output Circuit	Line drive differential mode 20 mA				
Operating Temperature	-20 °C .. +100 °C	-20 °C .. +85 °C	-20 °C .. +100 °C		
M_ Motors Associations					
M_56	-	-	-	-	-
M_70	-	-	-	Δ 10 mm	-
M_105	✓	✓	✓	-	✓
M_145	✓	✓	✓	-	✓
M_205	✓	✓	✓	-	✓
M_265	-	-	-	-	-

- Not possible

✓ Possible without increment

Δ Possible with increment motor length

Hiperface Absolute Encoder

Code	S1	S2	A6	A7
Type	Optical			
Turn	Single	Multi	Single	Multi
Incremental Signals	1 V _{PP}			
Line Count	1024			
Resolution	32768 (15 bit)		32768 (15 bit)	
Absolute rotation	1	4096	1	4096
System Accuracy	±45°			
Power Supply	8 VDC			
Max Speed [min ⁻¹]	6000			
Temperature	-20°C .. +115°C			
Safety integrity level:	SIL2 (IEC 61508), SILCL2 (IEC 62061)		Not Available	
MB / MH Motors Associations				
M_56	-	-	-	-
M_70	Δ 10mm	Δ 10mm	Δ 10mm	Δ 10mm
M_105	Δ 19mm	Δ 19mm	Δ 19mm	Δ 19mm
M_145	Δ 19mm	Δ 19mm	Δ 19mm	Δ 19mm
M_205	Δ 19mm	Δ 19mm	Δ 19mm	Δ 19mm
M_265	-	-	-	-

- Not possible

✓ Possible without increment

Δ Possible with increment motor length

EnDat Absolute Encoder

Code	B9	C1	D5
Type	Inductive	Optical	
Turn	Multi	Single	Multi
Incremental Signals	1V _{PP}		
Line Count	32	512	
Positions per revolutions	131 072 (17 bit)	8192 (13 bit)	
Distinguishable revolutions	4096	1	4096
System Accuracy	±400"	±60"	
Power Supply	5 VDC		
Max Speed [min ⁻¹]	12 000		7000
Temperature	-20 °C .. +115 °C	-40 °C .. +115 °C	-30 °C .. +115 °C
Absolute position values	EnDat 2.1	EnDat 2.2	
Safety integrity level:	Not Available		
M_ Motors Associations			
M_56	-	-	-
M_70	-	-	-
M_105	Δ 19 mm	Δ 19 mm	Δ 19 mm
M_145	✓	Δ 19 mm	Δ 19 mm
M_205	Δ 19 mm	Δ 19 mm	Δ 19 mm
M_265	-	-	✓

- Not possible

✓ Possible without increment


Δ Possible with increment motor length

Technical specifications for High inertia

Option Inertia	Added ...	Unit	105				145					205					265				
			0.2	0.4	0.6	0.8	0.4	0.8	15	22	28	15	28	50	70	90	75	150	205	270	
M	Inertia	[kgmm ²]	140				790					4400					On request				
	lenght	[mm]	0				0					0					On request				
	Weight	[kg]	0.340				0.990					2.065					On request				
ML	Inertia	[kgmm ²]	530			n.a.		1770			n.a.		12 100			n.a.		n.a.			
	Lenght	[mm]	64			n.a.		74			n.a.		99			n.a.		n.a.			
	Weight	[kg]	1.5			n.a.		3.3	3.6			n.a.		7.6	11.9			n.a.		n.a.	

Layout and connectors

M_ motors are available with different combinations of connectors and layout, depending of size of motor and the application

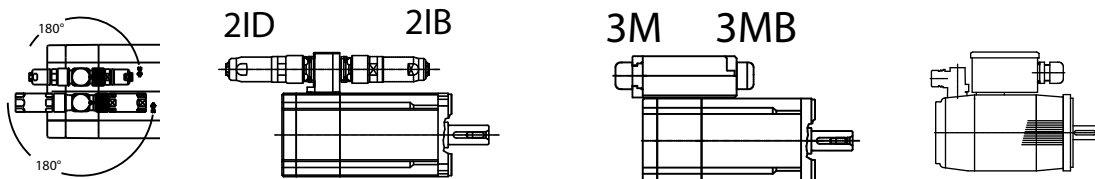

	2x Parallel upright connectors 2I	2x Forward facing connectors 2IB	2x Rear facing connectors 2ID	Terminal box rear facing 3M	Terminal box forward facing 3MB	Terminal box forward facing 3I
MB_56	-	✓	✓	-	-	-
MB_70	✓	-	-	✓	✓	-
MB_105	✓	-	-	✓	✓	-
MB_145	✓	-	-	✓	✓	✓
MB_205	-	-	-	✓	✓	✓
MB_265	-	-	-	✓	-	-
MH_56	-	✓	✓	-	-	-
MH_70	✓	-	-	-	-	-
MH_105	✓	-	-	-	-	-
MH_145	-	-	-	-	-	✓
MH_205	-	-	-	-	-	✓
MH_265	-	-	-	✓	-	-
ME_70	✓	-	-	-	-	-
ME_105	✓	-	-	-	-	-
ME_145	✓	-	-	-	-	✓
ME_205	-	-	-	-	-	✓
ME_265	-	-	-	✓	-	-

- Not possible
- ✓ Possible without increment
- Δ Possible with increment motor length

Shaft

M_ motors are available with or without key option; shafts are available in different sizes suitable for your existing machine or gearbox

Increased Safety

M_ motors size 105 and 145 are also available with increased safety which conform to ATEX.... directive 94/9/CE  II 2G Ex e II T3 with environment temperature between -20 and +40°C only with drive HIDX. The feature and characteristics of the MBX motors are different from the standard version. For more info please consult technical department of Parker EME.

Custom options

Flange and shafts

In addition to the standard product it is possible to specify a fully customized mechanical interface for the motor ie flange, shaft and mounting holes. This option requires technical collaboration between the customer and Parker.

KIT (frameless) options

We can also supply our motors as only stator + rotor. Our mechanical team will develop / propose the right solution for your mechanical application which integrates into the existing elements of the machine.

A second output shaft / external encoder mount

Certain applications need a second shaft on the rear of motor; for this reason with M_ motors we offer alternative solutions for adding existing feedback or other mechanical accessories. For more details contact your Parker sales engineer

Order Code

MB / MH Motors

To ensure that you select the correct motor we recommend that you have the following information.

- Diagram speed / time of load cycle to identify the type of the cycle (S1, S3 or others)
- Information about inertia load system
- Check the duty cycle - acceleration/deceleration
- Calculate the average torque and peak torque of the system
- Calculate the average speed and maximum speed of the cycle
- Check the temperature and altitude of environment / application
- Check the mechanical compatibility

With these preliminary data you can start to choose the motor (with the correct drive) for your application.

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
Order example	MB	x	A	V	205	11	28	5	9		2IB			64	A1			2

1	Type Of Motor (mandatory field)
ME	Motor with Encoder MB Series
MB	Motor with Resolver MB Series
MH	Motor with Resolver MH Series
2	eX Protection
empty field	Standard Motor No EX Certification
x	Motor with EX Certification (increased protection safety) (only for 105 and 145 without the holding brake at 3000 min ⁻¹) (only to be use only with HIDX...)
3	Brake Option
empty field	No Brake Option
A	Motor with Holding Brake (brakes when the supply voltage is 0)
B	Motor with BINDER Holding Brake (size 145 up to 15Nm and 205)
4	Cooling Option
empty field	No Cooling option
V	Motor with shaft-drive fan cooling
SV	Motor with (single-phase) motorised fan cooling
W	Water cooled motor (only size 145)
5	Motor Frame Size (mandatory field)
56	Torque range 0.2...0.6 Nm
70	Torque range 0.5...2,5 Nm
105	Torque range 2.2...8 Nm
145	Torque range 4.5...28 Nm
205	Torque range 15...90 Nm
265	Torque range 75...265 Nm
6	Winding (mandatory field)
nn	min ⁻¹ (x100) except for size 205 1150 min ⁻¹ which is only 11
7	Motor Torque (mandatory field)
nn	Torque Nm
8	Flange (mandatory field)
5	B5 Flange
6	116 mm Flange, only for frame 105
9	96 mm Flange, only for frame 105

9	Shaft (mandatory field)
9	9x20 mm for size 56
11	11x23 mm for size 56/70
14	14x30 mm for size 70
19	19x40 mm for size 105/145
24	24x50 mm for size 105/145
28	28x60 mm for size 145
38	38x80 mm for size 205
42	42x110 mm for size 205
48	48x110 mm for size 265
A*	Special shaft under request
10	Key Shaft option
empty field	Shaft with Key
S	Shaft without key
11	Layout - Connectors (mandatory field)
2I	Interconnectron rotatables receptacles (not for size 56 - 265 and 205 with Brake)
3M	Terminal Box - opposite shaft glands
3MB	Terminal Box -toward shaft glands
2IB	90° Interconnectron receptacles - forward facing
2ID	90° Interconnectron receptacles - rear facing
3I	Terminal Box + Interconnectron 90° (not for size 56-265)
3MBS	Terminal Box + Interconnectron 90° (only for size 265)
12	Female connectors option
empty field	With Female / flying connectors
W	Without Female / flying connectors
13	Form Option
empty field	No Foot Mount Option
3	B3 - Foot Mount Option
14	Protection Degree (mandatory field)
64	IP64 Degree
65	IP65 Degree

15	Feedback	
A1	Tamagawa OIH48 2000ppr / Under Request - Not Stock	
A2	Tamagawa OIH48 2048ppr for size 105/145/205	
A3	Tamagawa OIH48 4096ppr for size 105/145/205	
A6	Stegman SRS50 Hiperface Single-Turn for size 70/105/145/205	
A7	Stegman SRM50 Hiperface Multi-Turn for size 70/105/145/205	
B1	Encoder 3000ppr + Hall - TAMAGAWA OIH35	
B9	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQI1331	
C1	SinCos EnDat Encoder Single-Turn - HEIDENHAIN EQI1113	
C4	Encoder 5000ppr + Hall - TAMAGAWA OIH48	
D5	SinCos EnDat Encoder Multi-Turn - HEIDENHAIN EQN1325	
S1	SinCos Hiperface Encoder Single-Turn - STEGMANN SRS50S	
S2	SinCos Hiperface Encoder Multi-Turn - STEGMANN SRS50S	
16	Option Inertia	
	empty field	Standard Inertia
M		Medium Inertia
ML		High Inertia
17	Special Option	
	empty field	No Special Option
1Bxx		Motor with 2-side output shaft Where xx is the diameter of second shaft
Exx		Prearrangement for external encoder mounting; where xx is the model of feedback
18	Voltage	
0A		24V
0B		34V
0C		48V
0D		50V
0E		60V
0F		72V
0G		74V
0		80V
0H		96V
1A		108-110V
1D		120V
1B		125V
1C		150V
1		180V
2		220-230V
2A		222V
2B		200V
3		330V
4		380-400V
4A		425V
4C		460V
4B		490V

Cables and connectors are part of the accessories required for Parker motors; for different combination we offer propose different types of cables for signals and power. Below you will find the code structure.

Motor Power Cable for MB Motors

	1	2	3	4	5	6	7
Order example	CAVOMOT	A	1,5	5	PM	I	40

1	CAVOMOT	
	CAVOMOT	Power cable drive - motor
2	Brake wire	
	empty field	without brake wire
	A	Brake wire
3	Section [mm²]	
	1,5	1,5 mm²
	2,5	2,5 mm²
	4, 6, 10, 25	4 mm², 6 mm², 10 mm², 25 mm² (not for "PF" type)
4	Length [m]	
	1, ...	Length in metre
5	Application Type	
	PM	Standard cable
	PF	High flex cable
6	Motor Connector	
	M	Military Connector (Mil) [All Layout except 08 and 5]
	8	Military Connector (Mil) [All Layout 8]
	I	Interconnectron Connector (all layout)
	3	Terminal Connection Box (all layout except 3M/3MB/3MC/3MA)
	S	Terminal Connection Box layout 3M/3M/3MC/3MA
	SY	Terminal Connection for MBX motors (Cable no ATEX)
	SL	Terminal connection box layout 6i only for MB / MH205 motor
	F	Fast Connector
	A	Amphenol Connector (layout 0P, 1A, 1C, 2DA, ...)
	T	Trilogy Connector
	SL	Terminal connection box layout 6i only for MB / MH205 motor
	PRM	Patch Cord Military Connector (Mil) [All Layout except 08]
7	Motor Size	
	40..265	Motor Size
	M50	Trilogy Motor
	NX	Motors NX2-3-4-6 type NX----AKR70--

Feedback Cable for MB Motors

	1	2	3	4	5
Order example	CAVORES	4	PM	I	SLVDN

1	Signal Cable type	
	CAVORES	Resolver
	CAVOENC	Incremental encoder
	CAVOABS	Absolute Encoder EnDat+SinCos
	CAVOHIP	Absolute Encoder Hiperface+SinCos
	CAVOSIN	SinCos Encoder
	CAVOHAL	SinCos Encoder + Hall sensor
2	Length [m]	
	1, ...	Length in metre
3	Application Type	
	PM	Moving Application
4	Motor Connector	
	M	Military Connector (Mil) [All Layout except 08]
	8	Military Connector (Mil) [All Layout 8]
	I	Interconnectron Connector (all layout)
	S	Terminal Connection Box layout 3M/3M/3MC/3MA and motor MBX
	F	Fast Connector
	A	Amphenol Connector (layout 0P, 1A, 1C, 2DA, ...)
	T	Trilogy Connector
	NX	Motors NX2-3-4-6-8 type NX----AKR7---
	E	Free signal cable for EX motors
	PRM	Patch Cord Military Connector (Mil) [All Layout except 08]
5	Drive Type	
	LVD	LVD Drive
	HPD	HPD Drive
	SLVD	SLVD e SLVD-N Drive
	SLVDN	SLVD-N Drive
	TPD	TPD-M
	SPD/TWIN	TWIN_N e SPD_N Drive or wire without connector drive side
	HIDRIVE	Hi-Drive
	631	Servodrives 631
	638	Servodrives 638
	637F	Servodrives 637F

Motor Power Cable for MH Motors

	1	2
Order example	MOK	55/02

1	Cable
MOK	Motor cable ⁽²⁾
2	Type
	for SMH / MH56 / MH70 / MH105 ⁽³⁾
55/....⁽¹⁾	1,5 mm ² ; up to 13,8 A
54/....⁽¹⁾	1,5 mm ² ; up to 13,8 A Moving application
56/....⁽¹⁾	2,5 mm ² ; up to 18,9 A
57/....⁽¹⁾	2,5 mm ² ; up to 18,9 A Moving application
	for MH145 / MH205 ⁽⁴⁾
60/....⁽¹⁾	1,5 mm ² ; up to 13,8 A
63/....⁽¹⁾	1,5 mm ² ; up to 13,8 A Moving application
59/....⁽¹⁾	2,5 mm ² ; up to 18,9 A
64/....⁽¹⁾	2,5 mm ² ; up to 18,9 A Moving application
61/....⁽¹⁾	6 mm ² ; up to 32,3 A Moving application
62/....⁽¹⁾	10 mm ² ; up to 47,3 A Moving application

MOK55 and MOK54 are also possible for linear motors LXR406, LXR412 and BLMA.

Length code for cables

⁽¹⁾ Length code 1 (Example: SSK01/09 = length 25 m)

Length [m]	1,0	2,5	5,0	7,5	10,0	12,5	15,0	20,0	25,0	30,0	35,0	40,0	45,0	50,0
Order code	01	02	03	04	05	06	07	08	09	10	11	12	13	14

⁽²⁾ Color according to DESINA

⁽³⁾ with motor connector

⁽⁴⁾ with cable eye for motor terminal box

Feedback Cable for MH Motors

	1
Order example	REK42/02

1	Zubehör
	for MH/SMH-Motors
REK42/....⁽¹⁾	Resolver cable ⁽²⁾
REK41/....⁽¹⁾	Resolver cable ⁽²⁾ Moving application
GBK24/....⁽¹⁾	SinCos© Feedback cable ⁽²⁾ Moving application
GBK38/....⁽¹⁾	EnDat 2.1 Feedback cable ⁽²⁾ Moving application
GBK23/....⁽¹⁾	Encoder cable ⁽²⁾
	for linear motors
GBK33/....⁽¹⁾	Feedback cable for LXR Moving application
GBK32/....⁽¹⁾	Feedback cable for BLMA Moving application

Parker's Motion & Control Technologies

At Parker, we're guided by a relentless drive to help our customers become more productive and achieve higher levels of profitability by engineering the best systems for their requirements. It means looking at customer applications from many angles to find new ways to create value. Whatever the motion and control technology need, Parker has the experience, breadth of product and global reach to consistently deliver. No company knows more about motion and control technology than Parker. For further info call 00800 27 27 5374.



AEROSPACE

Key Markets

- Aircraft engines
- Business & general aviation
- Commercial transports
- Land-based weapons systems
- Military aircraft
- Missiles & launch vehicles
- Regional transports
- Unmanned aerial vehicles

Key Products

- Flight control systems & components
- Fluid conveyance systems
- Fluid metering delivery & atomization devices
- Fuel systems & components
- Hydraulic systems & components
- Inert nitrogen generating systems
- Pneumatic systems & components
- Wheels & brakes



CLIMATE CONTROL

Key Markets

- Agriculture
- Air conditioning
- Food, beverage & dairy
- Life sciences & medical
- Precision cooling
- Processing
- Transportation

Key Products

- CO₂ controls
- Electronic controllers
- Filter driers
- Hand shut-off valves
- Hose & fittings
- Pressure regulating valves
- Refrigerant distributors
- Safety relief valves
- Solenoid valves
- Thermostatic expansion valves



ELECTROMECHANICAL

Key Markets

- Aerospace
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Paper machinery
- Plastics machinery & converting
- Primary metals
- Semiconductor & electronics
- Textile
- Wire & cable

Key Products

- AC/DC drives & systems
- Electric actuators
- Controllers
- Gantry robots
- Gearheads
- Human machine interfaces
- Industrial PCs
- Inverters
- Linear motors, slides and stages
- Precision stages
- Stepper motors
- Servo motors, drives & controls
- Structural extrusions



FILTRATION

Key Markets

- Food & beverage
- Industrial machinery
- Life sciences
- Marine
- Mobile equipment
- Oil & gas
- Power generation
- Process
- Transportation

Key Products

- Analytical gas generators
- Compressed air & gas filters
- Condition monitoring
- Engine air, fuel & oil filtration & systems
- Hydraulic, lubrication & coolant filters
- Process, chemical, water & microfiltration filters
- Nitrogen, hydrogen & zero air generators



FLUID & GAS HANDLING

Key Markets

- Aerospace
- Agriculture
- Bulk chemical handling
- Construction machinery
- Food & beverage
- Fuel & gas delivery
- Industrial machinery
- Mobile
- Oil & gas
- Transportation
- Welding

Key Products

- Brass fittings & valves
- Diagnostic equipment
- Fluid conveyance systems
- Industrial hose
- PTFE & PFA hose, tubing & plastic fittings
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



HYDRAULICS

Key Markets

- Aerospace
- Aerial lift
- Agriculture
- Construction machinery
- Forestry
- Industrial machinery
- Mining
- Oil & gas
- Power generation & energy
- Truck hydraulics

Key Products

- Diagnostic equipment
- Hydraulic cylinders
- Hydraulic motors & pumps
- Hydraulic systems
- Hydraulic valves & controls
- Power take-offs
- Rubber & thermoplastic hose & couplings
- Tube fittings & adapters
- Quick disconnects



PNEUMATICS

Key Markets

- Aerospace
- Conveyor & material handling
- Factory automation
- Food & beverage
- Life science & medical
- Machine tools
- Packaging machinery
- Transportation & automotive

Key Products

- Air preparation
- Compact cylinders
- Field bus valve systems
- Grippers
- Guided cylinders
- Manifolds
- Miniature fluidics
- Pneumatic accessories
- Pneumatic actuators & grippers
- Pneumatic valves and controls
- Rodless cylinders
- Rotary actuators
- Tie rod cylinders
- Vacuum generators, cups & sensors



PROCESS CONTROL

Key Markets

- Chemical & refining
- Food, beverage & dairy
- Medical & dental
- Microelectronics
- Oil & gas
- Power generation

Key Products

- Analytical sample conditioning products & systems
- Fluoropolymer chemical delivery fittings, valves & pumps
- High purity gas delivery fittings, valves & regulators
- Instrumentation fittings, valves & regulators
- Medium pressure fittings & valves
- Process control manifolds



SEALING & SHIELDING

Key Markets

- Aerospace
- Chemical processing
- Consumer
- Energy, oil & gas
- Fluid power
- General industrial
- Information technology
- Life sciences
- Military
- Semiconductor
- Telecommunications
- Transportation

Key Products

- Dynamic seals
- Elastomeric o-rings
- EMI shielding
- Extruded & precision-cut, fabricated elastomeric seals
- Homogeneous & inserted elastomeric shapes
- High temperature metal seals
- Metal & plastic retained composite seals
- Thermal management

Parker Worldwide

Europe, Middle East, Africa

AE – United Arab Emirates, Dubai
Tel: +971 4 8127100
parker.me@parker.com

AT – Austria, Wiener Neustadt
Tel: +43 (0)2622 23501-0
parker.austria@parker.com

AT – Eastern Europe, Wiener Neustadt
Tel: +43 (0)2622 23501 900
parker.easteurope@parker.com

AZ – Azerbaijan, Baku
Tel: +994 50 2233 458
parker.azerbaijan@parker.com

BE/LU – Belgium, Nivelles
Tel: +32 (0)67 280 900
parker.belgium@parker.com

BY – Belarus, Minsk
Tel: +375 17 209 9399
parker.belarus@parker.com

CH – Switzerland, Etoy
Tel: +41 (0)21 821 87 00
parker.switzerland@parker.com

CZ – Czech Republic, Klecany
Tel: +420 284 083 111
parker.czechrepublic@parker.com

DE – Germany, Kaarst
Tel: +49 (0)2131 4016 0
parker.germany@parker.com

DK – Denmark, Ballerup
Tel: +45 43 56 04 00
parker.denmark@parker.com

ES – Spain, Madrid
Tel: +34 902 330 001
parker.spain@parker.com

FI – Finland, Vantaa
Tel: +358 (0)20 753 2500
parker.finland@parker.com

FR – France, Contamine s/Arve
Tel: +33 (0)4 50 25 80 25
parker.france@parker.com

GR – Greece, Athens
Tel: +30 210 933 6450
parker.greece@parker.com

HU – Hungary, Budapest
Tel: +36 1 220 4155
parker.hungary@parker.com

IE – Ireland, Dublin
Tel: +353 (0)1 466 6370
parker.ireland@parker.com

IT – Italy, Corsico (MI)
Tel: +39 02 45 19 21
parker.italy@parker.com

KZ – Kazakhstan, Almaty
Tel: +7 7272 505 800
parker.easteurope@parker.com

NL – The Netherlands, Oldenzaal
Tel: +31 (0)541 585 000
parker.nl@parker.com

NO – Norway, Asker
Tel: +47 66 75 34 00
parker.norway@parker.com

PL – Poland, Warsaw
Tel: +48 (0)22 573 24 00
parker.poland@parker.com

PT – Portugal, Leca da Palmeira
Tel: +351 22 999 7360
parker.portugal@parker.com

RO – Romania, Bucharest
Tel: +40 21 252 1382
parker.romania@parker.com

RU – Russia, Moscow
Tel: +7 495 645-2156
parker.russia@parker.com

SE – Sweden, Spånga
Tel: +46 (0)8 59 79 50 00
parker.sweden@parker.com

SK – Slovakia, Banská Bystrica
Tel: +421 484 162 252
parker.slovakia@parker.com

SL – Slovenia, Novo Mesto
Tel: +386 7 337 6650
parker.slovenia@parker.com

TR – Turkey, Istanbul
Tel: +90 216 4997081
parker.turkey@parker.com

UA – Ukraine, Kiev
Tel: +380 44 494 2731
parker.ukraine@parker.com

UK – United Kingdom, Warwick
Tel: +44 (0)1926 317 878
parker.uk@parker.com

ZA – South Africa, Kempton Park
Tel: +27 (0)11 961 0700
parker.southafrica@parker.com

North America

CA – Canada, Milton, Ontario
Tel: +1 905 693 3000

US – USA, Cleveland
Tel: +1 216 896 3000

Asia Pacific

AU – Australia, Castle Hill
Tel: +61 (0)2-9634 7777

CN – China, Shanghai
Tel: +86 21 2899 5000

HK – Hong Kong
Tel: +852 2428 8008

IN – India, Mumbai
Tel: +91 22 6513 7081-85

JP – Japan, Tokyo
Tel: +81 (0)3 6408 3901

KR – South Korea, Seoul
Tel: +82 2 559 0400

MY – Malaysia, Shah Alam
Tel: +60 3 7849 0800

NZ – New Zealand, Mt Wellington
Tel: +64 9 574 1744

SG – Singapore
Tel: +65 6887 6300

TH – Thailand, Bangkok
Tel: +662 186 7000-99

TW – Taiwan, Taipei
Tel: +886 2 2298 8987

South America

AR – Argentina, Buenos Aires
Tel: +54 3327 44 4129

BR – Brazil, Sao Jose dos Campos
Tel: +55 800 727 5374

CL – Chile, Santiago
Tel: +56 2 623 1216

MX – Mexico, Apodaca
Tel: +52 81 8156 6000

We reserve the right to make technical changes. The data correspond to the technical state at the time of printing.
© 2011 Parker Hannifin Corporation.
All rights reserved.

192-061012N2

November 2011

EMEA Product Information Centre
Free phone: 00 800 27 27 5374

(from AT, BE, CH, CZ, DE, DK, EE, ES, FI, FR, IE, IL, IS, IT, LU, MT, NL, NO, PL, PT, RU, SE, SK, UK, ZA)

US Product Information Centre
Toll-free number: 1-800-27 27 537
www.parker.com

Your local authorized Parker distributor

